


FEATURES

- | Fast response, instantly clamping the transient over voltage.
- | High surge current handling capability.
- | High energy absorption capability.
- | Low clamping voltages, providing better surge protection.
- | Low capacitance values, providing digital switching circuitry protection.
- | High insulation resistance, preventing electric arcing to the adjacent devices or circuits.



APPLICATIONS

- | Universal Serial Bus (USB).
- | Mobile communication.
- | Computer/DSP product.
- | Video and audio ports.
- | Portable/Hand-Held Products.
- | Data, Diagnostic I/O ports.

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

ELECTRICAL SPECIFICATION

Technical Data	Symbol	Value	Unit
Maximum allowable continuous AC voltage at 50-60Hz	V_{RMS}	NIL	V
Maximum allowable continuous DC voltage	V_{DC}	24	V
Varistor breakdown voltage	V_V	100-150	V
Typical capacitance value measured at 1MHz	C	2.5	pF
Typical capacitance value tolerance	t	±40	%
Maximum allowable clamping voltage	V_C	200	V
Leakage current at VDC (at initial state)	I_{LDC}	<1	μA
Leakage current at VDC (after ESD test)	I_{LDCA}	<2	μA
Response time	T_{rise}	<1	ns
Rated peak single pulse transient current at	I_P	1	A
Maximum Energy Absorption 10/1000μs	E	0.01	J
ESD Per IEC 61000-4-2 (Air)	V_{ESD}	±15	kV
ESD Per IEC 61000-4-2 (Contact)	V_{ESD}	±8	kV
Operation ambient temperature	T_{OPT}	-55~+125	°C
Storage temperature range	T_{STG}	-55~+125	°C


Notes : *1 The varistor breakdown voltage was measured at 1mA. *2 The clamping voltage was measured at 8/20μs standard current.
 *3 The leakage current was measured at working voltage *4 Insulation resistance greater than 10MΩ

RELIABILITY TESTING PROCEDURES


Characteristic	Test method and description			
High Temperature Storage	The specimen shall be subjected to 125°C for 1000 hours in a thermostatic bath without load and then stored at room temperature and humidity for 1 to 2 hours. The change of varistor voltage shall be within 10%.			
Temperature Cycle	The temperature cycle of specified temperature shall be repeated five times and then stored at room temperature and humidity for one two hours. The change of varistor voltage shall be within 10%and mechanical damage shall be examined.	Step	Temperature	Period
		1	-40±3°C	30min±3
		2	Room Temperature	1~2hours
		3	125±2°C	30min±3
		4	Room Temperature	1~2hours
High Temperature Load	After being continuously applied the maximum allowable voltage at 125°C for 1000hours, the specimen shall be stored at room temperature and humidity for one or hours, the change of varistor voltage shall be within 10%			
Damp Heat Load/ Humidity Load	The specimen should be subjected to 40°C,90 to 95%RH environment, and the maximum allowable voltage applied for 1000 hours, then stored at room temperature and humidity for one or two hours. The change of varistor voltage shall be within 10%.			
Low Temperature Storage	The specimen should be subjected to -40°C, without load for 1000 hours and then stored at room temperature for one two hours. The change of varistor voltage shall be within 10%.			

SOLDERING RECOMMENDATIONS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

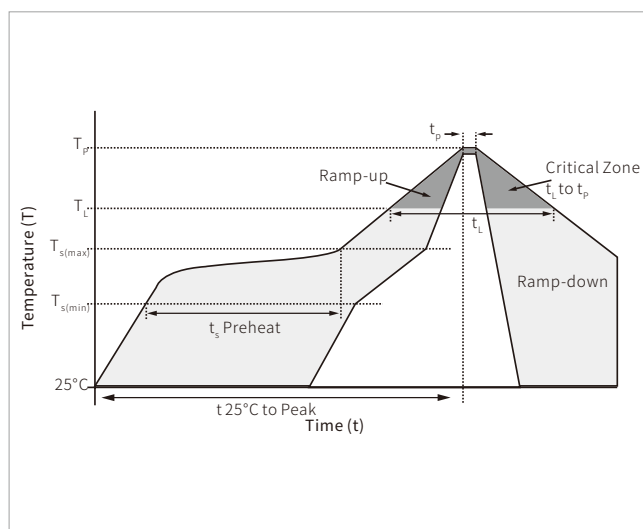

DIMENSION SPECIFICATION

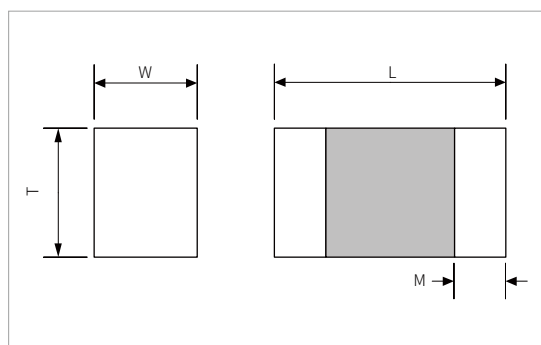

Size	L(mm)	W(mm)	T(mm)	M(mm)
0402	1.0±0.10	0.5±0.10	≤ 0.6	0.20±0.10

ORDERING INFORMATION

Part Number	Package&Size	QTY/Reel	Reel Size
PESD0402B24LA	0402 (1.0 x 0.5 mm)	10000PCS	7"

To find your local partner within Semiwell' s website : www.semiwell.com
© 2023 Semiwell Microelectronics Co.,Ltd.

The content of this document has been carefully checked and understood. However, neither Semiwell nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiwell does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiwell. Latest publications and a complete disclaimer can be downloaded from the Semiwell website. All trademarks recognized.