

FEATURES

| ESD protection of one automotive

LIN-bus line

| Asymmetrical diode configuration ensures an optimized protection against

ElectroMagnetic Interferences (EMI) of a LIN

Electronic Control Unit (ECU)

| Meet AEC-Q101 Requirements

APPLICATIONS

| LIN-bus protection


| Automotive applications



SOD-323



Marking



Schematic Symbol

IEC COMPATIBILITY

| IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)

| IEC61000-4-4 (EFT) 40A (5/50ns)

APPROVALS

RoHS Compliance with 2011/65/EU

HF Compliance with IEC61249-2-21:2003



THERMAL CONSIDERATIONS

Symbol	Parameter	Value	Unit
P_{pp}	Peak Pulse Power ($t_p=8/20\mu\text{s}$ waveform)	160	Watts
T_J	junction temperature	150	$^{\circ}\text{C}$
T_{amb}	ambient temperature	-65 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-65 to +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS


Symbol	Parameter		Condition	Min.	Typ.	Max.	Unit
V_{RWM}	Reverse Stand-off Voltage	PESD1LIN (15 V)				15	V
		PESD1LIN (24 V)				24	
V_{BR}	Reverse Breakdown Voltage	PESD1LIN (15 V)	$I_T=5mA$	17.1	18.9	20.3	V
		PESD1LIN (24 V)		25.4	27.8	30.3	
I_R	Reverse Leakage Current	PESD1LIN (15 V)	$V_{RWM}=15V$		< 1	50	nA
		PESD1LIN (24 V)	$V_{RWM}=24V$		< 1	50	
V_C	Clamping Voltage	PESD1LIN (15 V)	$I_{PP}=1A, t_p=8/20\mu s$			25	V
			$I_{PP}=5A, t_p=8/20\mu s$			44	
V_C	Clamping Voltage	PESD1LIN (24 V)	$I_{PP}=1A, t_p=8/20\mu s$			40	V
			$I_{PP}=3A, t_p=8/20\mu s$			70	
rdif	Differential resistance	PESD1LIN (15 V)	$I_R = 1 \text{ mA}$			225	Ω
		PESD1LIN (24 V)	$I_R = 1 \text{ mA}$			300	
C_J	Diode capacitance		$V_R=0V, f=1MHz$		13	17	pF

CHARACTERISTIC CURVES

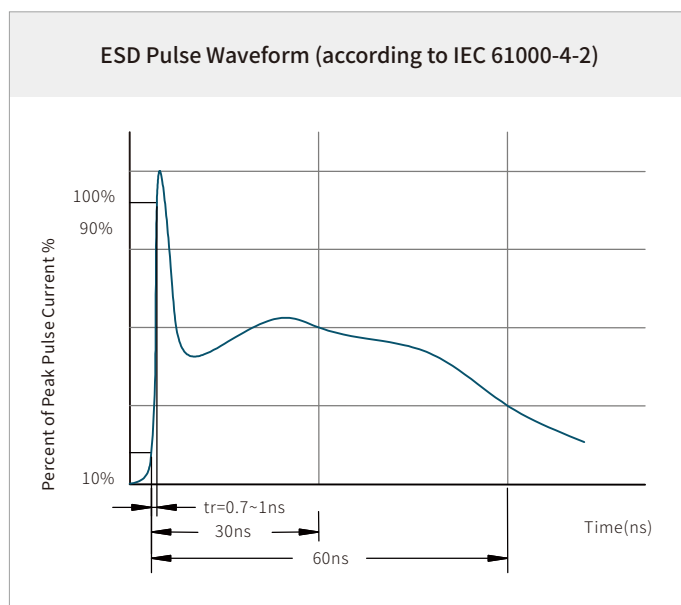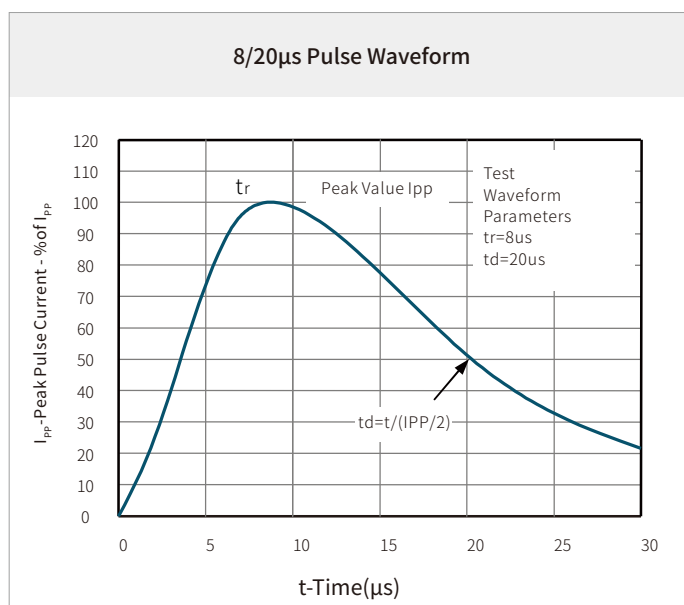


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

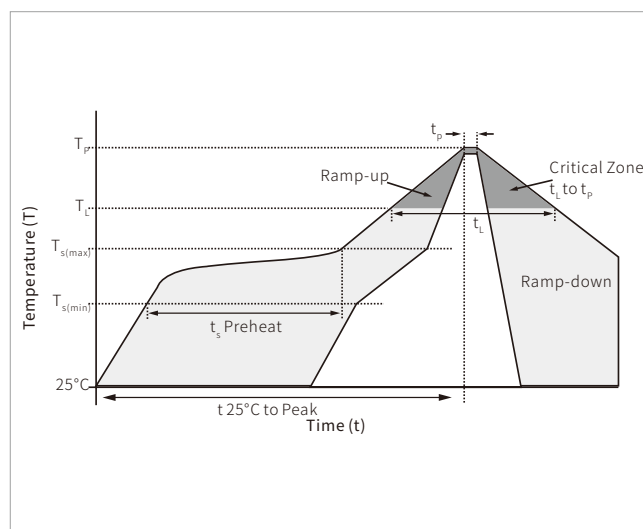


SOD-323 PACKAGE INFORMATION

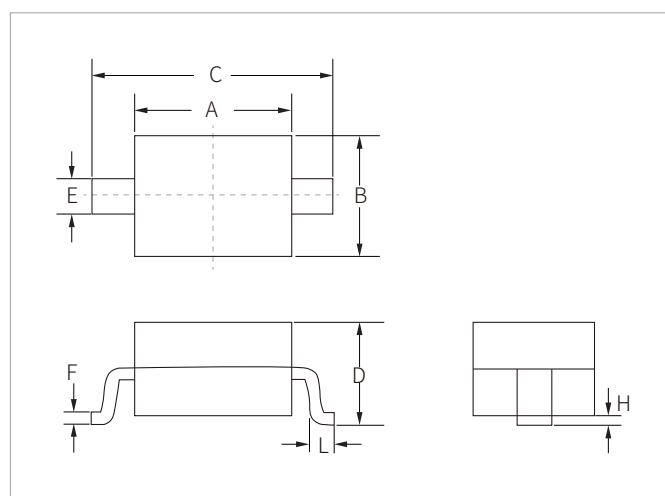

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.90	0.063	0.075
B	1.15	1.45	0.045	0.057
C	2.35	2.75	0.093	0.108
D	0.80	1.10	0.031	0.043
E	0.25	0.40	0.010	0.016
F	0.10	0.20	0.004	0.008
H	-	0.10	-	0.004
L	0.20	0.40	0.008	0.016

RECOMMENDED PAD LAYOUT DIMENSIONS

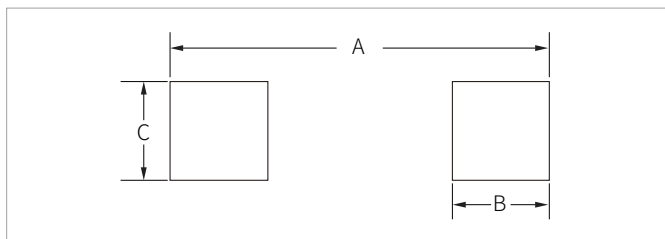

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.87	3.12	0.113	0.123
B	0.66	0.91	0.026	0.036
C	0.66	0.91	0.026	0.036

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
PESD1LIN	SOD-323	3000PCS	7"

To find your local partner within Semiwell' s website : www.semiwell.com

© 2023 Semiwell Microelectronics Co.,Ltd.

The content of this document has been carefully checked and understood. However, neither Semiwell nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiwell does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiwell. Latest publications and a complete disclaimer can be downloaded from the Semiwell website. All trademarks recognized.